


GW-CBB1

K1-A2-250/300/400/500/600



MOTION
DETECTION

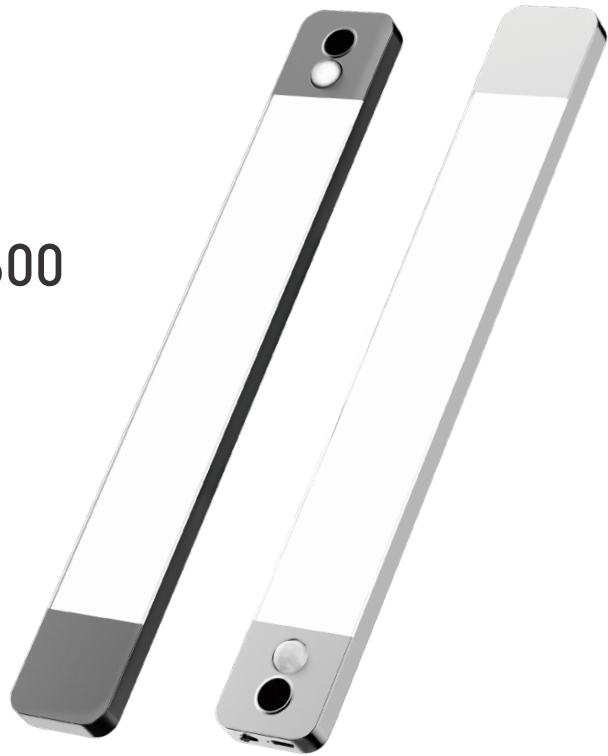

HAND-SWEEP
SENSING



DIMABLE





DAY/NIGHT
LIGHT

Product Features

- **LED Technology**—Three selectable color temps
- **Hand Sweep Sensing**—In ON mode, hand sweep can turn on/off the light, proves the convenience of operation.
- **PIR Sensor**—In AUTO mode, human body motion sensor works when brightness is lower than 6 lux.
- **Stepless Dimming**—10-100% stepless dimming.


Unit: mm

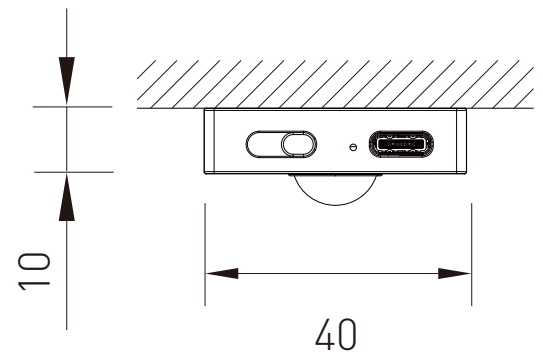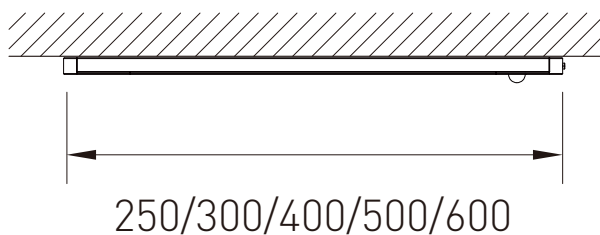

Specification

Model	GW-CBB1-K1-A2-250	Luminous Flux	60lm	LED QTY	34 PCS SMD LED
Product Dimension	250*40*10mm	Charging	5V DC 1A	Color Temp	3000K/4000K/6500K
Material	ABS+PS+Aluminium	RA	>80	Power	1w
Color	Wood/Silver/Marble/Black	IP	20	Hand sweep distance	<8cm
Battery	3.7V 1500mAh	Lifespan	20000H	PIR sensing distance	3-6m

SPECTRUM TEST REPORT

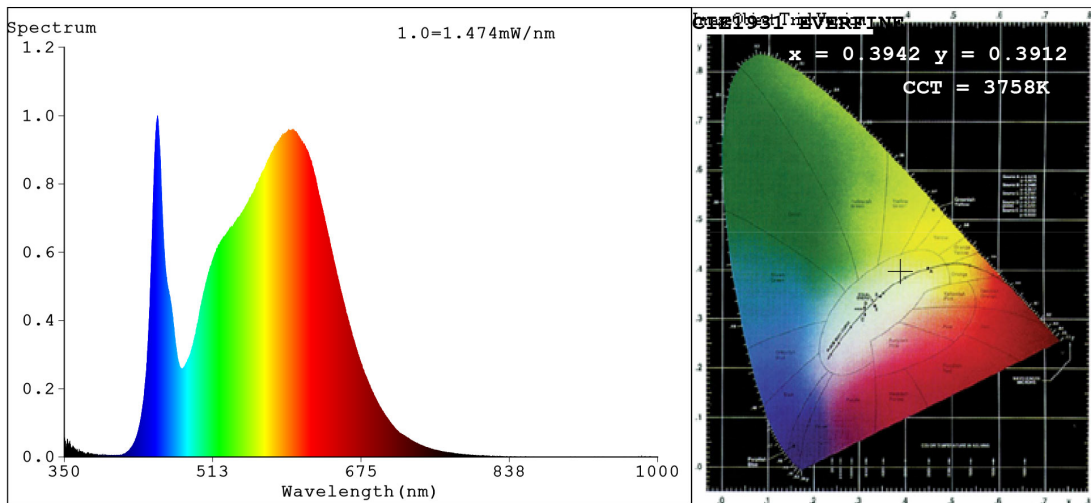

Color Parameters:

Chromaticity Coordinate: $x=0.3942$ $y=0.3912$ $u'=0.2283$ $v'=0.5098$
 CCT=3758K (Duv=0.0028) Dominant WL:Ld =578.7nm WL:Lc = --nm Purity=35.7%
 Ratio:R=19.2% G=77.4% B=3.4% Peak WL:Lp=452.1nm FWHM=19.1nm
 Render Index:Ra=84.2 AvgR=77.8

R1 =82 R2 =90 R3 =96 R4 =83 R5 =82 R6 =87 R7 =87
 R8 =65 R9 =13 R10=77 R11=82 R12=62 R13=84 R14=98 R15=76

Photo Parameters:

Flux = 80.22 lm Eff. : 0.00 lm/W Fe = 242.1 mW

Electrical parameters:


V = 0 V I = 0 A P = 0 W PF = 0
 LEVEL:Class1 WHITE:ANSI_4000K
 Status: Integral T = 2000 ms Ip = 35862 (55%)

GBT5702

Specification

Model	GW-CBB1-K1-A2-300	Luminous Flux	120lm	LED QTY	44 PCS SMD LED
Product Dimension	300*40*10mm	Charging	5V DC 1A	Color Temp	3000K/4000K/6500K
Material	ABS+PS+Aluminium	RA	>80	Power	2w
Color	Wood+Silver+Marble+Black	IP	20	Hand sweep distance	<8cm
Battery	3.7V 2200mAh	Lifespan	20000H	PIR sensing distance	3-6m

SPECTRUM TEST REPORT

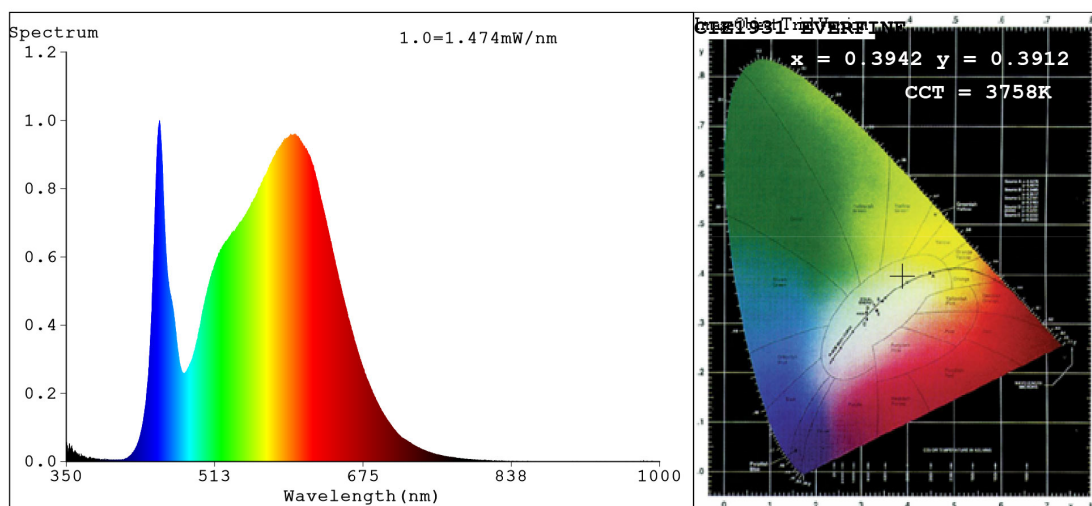

Color Parameters:

Chromaticity Coordinate: $x=0.3942$ $y=0.3912$ / $u'=0.2283$ $v'=0.5098$
 CCT=3758K (Duv=0.0028) Dominant WL:Ld =578.7nm WL:Lc = --nm Purity=35.7%
 Ratio:R=19.2% G=77.4% B=3.4% Peak WL:Lp=452.1nm FWHM=19.1nm
 Render Index:Ra=84.2 AvgR=77.8

R1 =82 R2 =90 R3 =96 R4 =83 R5 =82 R6 =87 R7 =87
 R8 =65 R9 =13 R10=77 R11=82 R12=62 R13=84 R14=98 R15=76

Photo Parameters:

Flux = 80.22 lm Eff. : 0.00 lm/W Fe = 242.1 mW

Electrical parameters:


V = 0 V I = 0 A P = 0 W PF = 0
 LEVEL:Class1 WHITE:ANSI_4000K
 Status: Integral T = 2000 ms Ip = 35862 (55%)

GBT5702

Specification

Model	GW-CBB1-K1-A2-400	Luminous Flux	150lm	LED QTY	64 PCS SMD LED
Product Dimension	400*40*10mm	Charging	5V DC 1A	Color Temp	3000K/4000K/6500K
Material	ABS+PS+Aluminium	RA	>80	Power	2.5w
Color	Wood+Silver+Marble+Black	IP	20	Hand sweep distance	<8cm
Battery	3.7V 3000mAh	Lifespan	20000H	PIR sensing distance	3-6m

SPECTRUM TEST REPORT

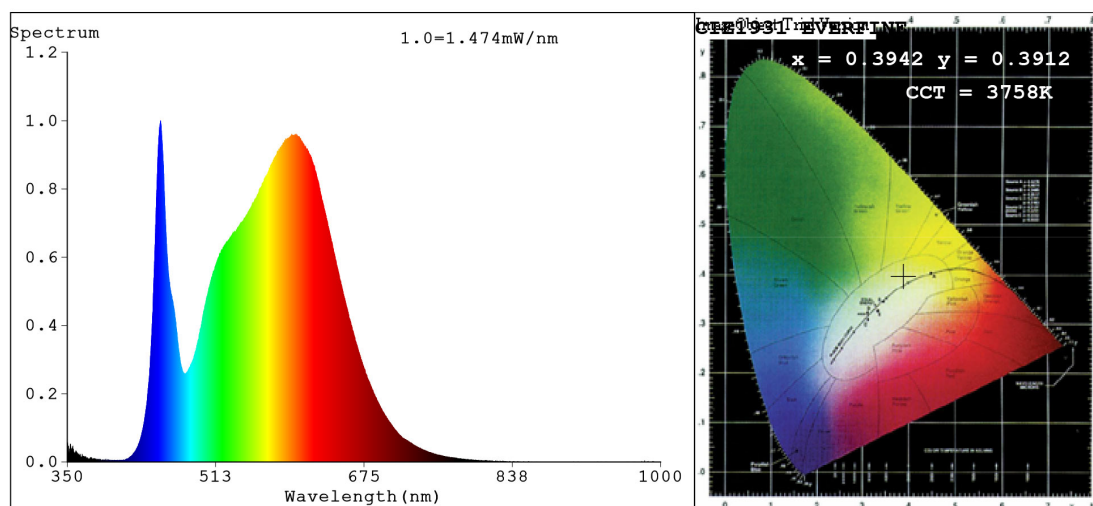

Color Parameters:

Chromaticity Coordinate: $x=0.3942$ $y=0.3912$ / $u'=0.2283$ $v'=0.5098$
 CCT=3758K (Duv=0.0028) Dominant WL:Ld =578.7nm WL:Lc = --nm Purity=35.7%
 Ratio:R=19.2% G=77.4% B=3.4% Peak WL:Lp=452.1nm FWHM=19.1nm
 Render Index:Ra=84.2 AvgR=77.8

R1 =82 R2 =90 R3 =96 R4 =83 R5 =82 R6 =87 R7 =87
 R8 =65 R9 =13 R10=77 R11=82 R12=62 R13=84 R14=98 R15=76

Photo Parameters:

Flux = 80.22 lm Eff. : 0.00 lm/W Fe = 242.1 mW

Electrical parameters:


V = 0 V I = 0 A P = 0 W PF = 0
 LEVEL:Class1 WHITE:ANSI_4000K
 Status: Integral T = 2000 ms Ip = 35862 (55%)

GBT5702

Specification

Model	GW-CBB1-K1-A2-500	Luminous Flux	180lm	LED QTY	84 PCS SMD LED
Product Dimension	500*40*10mm	Charging	5V DC 1A	Color Temp	3000K/4000K/6500K
Material	ABS+PS+Aluminium	RA	>80	Power	3w
Color	Wood+Silver+Marble+Black	IP	20	Hand sweep distance	< 8cm
Battery	3.7V 3000mAh	Lifespan	20000H	PIR sensing distance	3-6m

SPECTRUM TEST REPORT

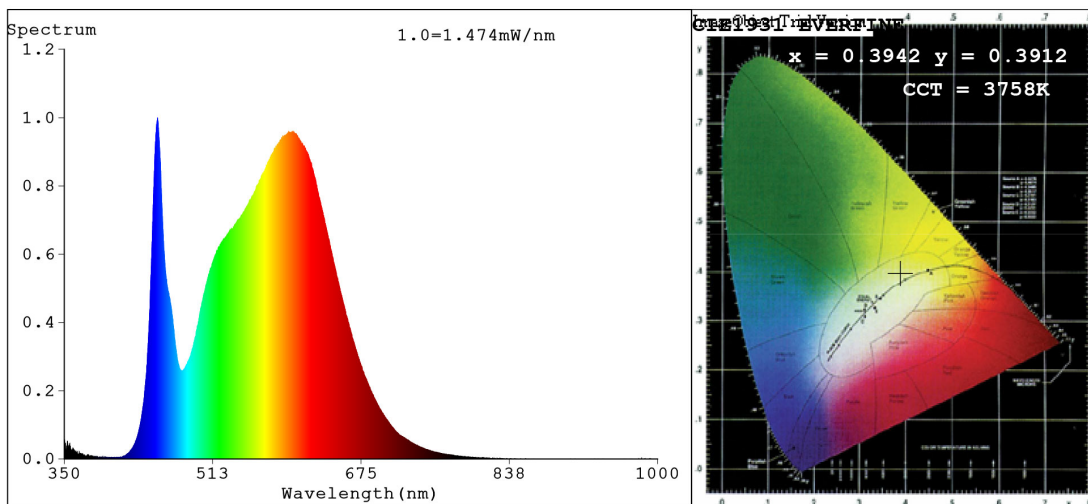

Color Parameters:

Chromaticity Coordinate: $x=0.3942$ $y=0.3912$ / $u'=0.2283$ $v'=0.5098$
 CCT=3758K (Duv=0.0028) Dominant WL:Ld =578.7nm WL:Lc = --nm Purity=35.7%
 Ratio:R=19.2% G=77.4% B=3.4% Peak WL:Lp=452.1nm FWHM=19.1nm
 Render Index:Ra=84.2 AvgR=77.8

R1 =82 R2 =90 R3 =96 R4 =83 R5 =82 R6 =87 R7 =87
 R8 =65 R9 =13 R10=77 R11=82 R12=62 R13=84 R14=98 R15=76

Photo Parameters:

Flux = 80.22 lm Eff. : 0.00 lm/W Fe = 242.1 mW

Electrical parameters:


V = 0 V I = 0 A P = 0 W PF = 0
 LEVEL:Class1 WHITE:ANSI_4000K
 Status: Integral T = 2000 ms Ip = 35862 (55%)

GBT5702

Specification

Model	GW-CBB1-K1-A2-600	Luminous Flux	240lm	LED QTY	104 PCS SMD LED
Product Dimension	600*40*10mm	Charging	5V DC 1A	Color Temp	3000K/4000K/6500K
Material	ABS+PS+Aluminium	RA	>80	Power	4w
Color	Wood+Silver+Marble+Black	IP	20	Hand sweep distance	<8cm
Battery	3.7V 4400mAh	Lifespan	20000H	PIR sensing distance	3-6m

SPECTRUM TEST REPORT

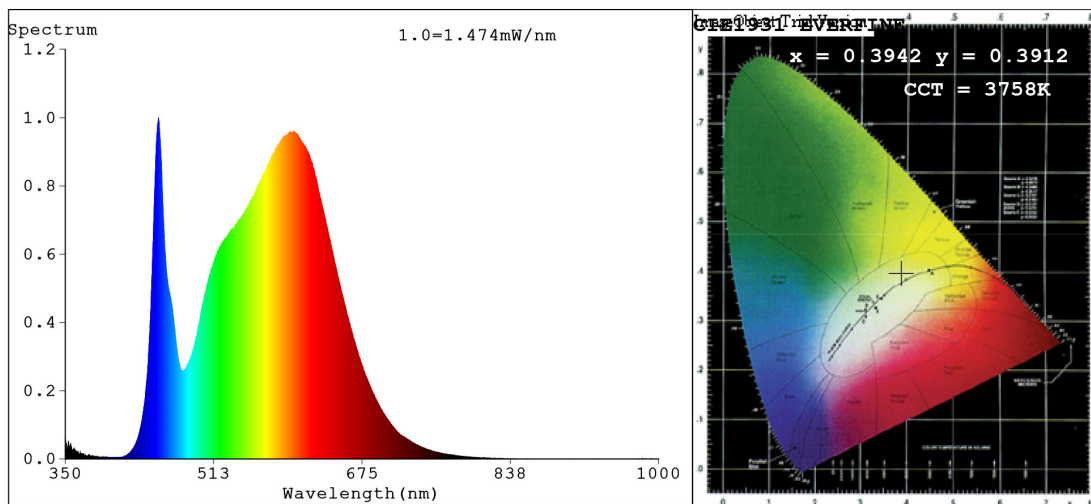

Color Parameters:

Chromaticity Coordinate: $x=0.3942$ $y=0.3912$ / $u'=0.2283$ $v'=0.5098$
 CCT=3758K (Duv=0.0028) Dominant WL:Ld =578.7nm WL:Lc = --nm Purity=35.7%
 Ratio:R=19.2% G=77.4% B=3.4% Peak WL:Lp=452.1nm FWHM=19.1nm
 Render Index:Ra=84.2 AvgR=77.8

R1 =82 R2 =90 R3 =96 R4 =83 R5 =82 R6 =87 R7 =87
 R8 =65 R9 =13 R10=77 R11=82 R12=62 R13=84 R14=98 R15=76

Photo Parameters:

Flux = 80.22 lm Eff. : 0.00 lm/W Fe = 242.1 mW

Electrical parameters:

V = 0 V I = 0 A P = 0 W PF = 0
 LEVEL:Class1 WHITE:ANSI_4000K
 Status: Integral T = 2000 ms Ip = 35862 (55%)

GBT5702